

DYNAPAC



Part of the Atlas Copco Group

CC102

Double drum vibratory rollers



Technical data

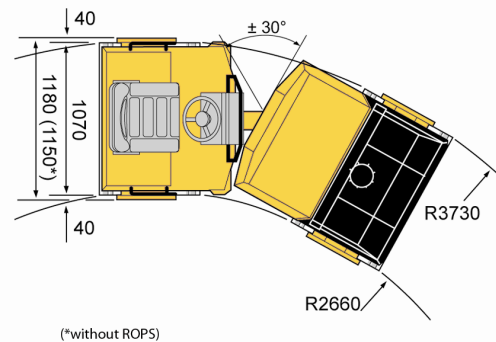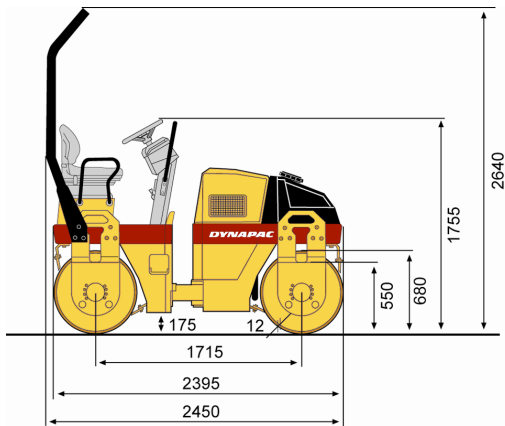

(*without ROPS)

Masses	CC102
Max. operating mass	2,460 kg
Operating mass (incl. ROPS)	2,350 kg
Module mass (front/ rear)	1,130/ 1,220 kg
Traction	
Speed range (km/ h)	0-10
Vertical oscillation	±10°
Theor. gradeability	50 %
Compaction	
Water tank (l)	160
Static linear load (front/ rear)	10.6/ 11.4 kg/ cm
Centrifugal force	23 kN
Nominal amplitude	0.5 mm
Vibration frequency	57 Hz
Engine	
Manufacturer	Deutz
Model	D2011 L02 I
Type	Air cooled diesel
Rated power	31 hp
Rated power	23 kW
Rated power @	2,800 rpm
Rated power (rating standard)	SAE J1995
Fuel tank capacity	50 l
Hydraulic system	
Driving	Axial piston pump with variable displacement. Radial piston motors (2) with constant displacement. Gear pump/ motors with constant displacement.
Vibration	Gear pump with constant displacement.
Steering	Hydrostatic in forward and reverse lever.
Service brake	Failsafe multidisc brake in both drums.
Parking/ Emergency brake	

Find your local dealer at www.dynapac.com

We reserve the right to change specifications without notice. Photos and illustrations do not always show standard versions of machines. The above information is a general description only, all informations are supplied without liability.